

08/15/00

1c715 U.S. PTO

S&H Form: PTO/SB/05 (9/99)

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1046.1218 (JDH)

First Named Inventor or Application Identifier:

Atsushi HORIIE

Express Mail Label No.

1c715 U.S. PTO
09/639763

08/15/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 39]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 18]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed) Japanese Appln. 2000-74123, filed March 16, 2000
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:[☐ Continuation [☐ Divisional [☐ Continuation-in-part (CIP) of prior application No: 1]**18. CORRESPONDENCE ADDRESS**

21171

PATENT TRADEMARK OFFICE

Staas & Halsey

NEW APPLICATION FEE TRANSMITTAL

		Attorney Docket No.	1046.1289 (JDH)
		Application Number	To be assigned
		Filing Date	August 15, 2000
AMOUNT ENCLOSED	\$1,120.00	First Named Inventor	Atsushi HORIIKE

FEE CALCULATION (fees effective 12/29/99)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS	12	- 20 =	0	X \$ 18.00 =	\$
INDEPENDENT CLAIMS	4	- 3 =	1	X \$ 78.00 =	78.00
MULTIPLE DEPENDENT CLAIMS (any number; if applicable)				+ \$260.00 =	
				BASIC FILING FEE	690.00
				Total of above Calculations =	\$ 768.00
Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)					+
Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).					-
				TOTAL FILING FEE =	\$ 768.00
Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))					+
Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))					40.00
				TOTAL FEES DUE =	\$ 808.00


METHOD OF PAYMENT

- ☒ Check enclosed as payment.
- ☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
- ☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:
- | | |
|----------------------|--------------------|
| Deposit Account No. | 19-3935 |
| Deposit Account Name | STAAS & HALSEY LLP |
- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	August 15, 2000

EDITING METHOD AND MEDIUM IN CAD SYSTEM

BACKGROUND OF THE INVENTION

The present invention relates to a three-dimensional CAD (Computer Aided Design) system.

5 In the three-dimensional CAD system, basic configurations such as a rotary body, a protrusion, a hole, etc. (which are called features) are defined. Then, a user creates a final three-dimensional configuration by combining the defined basic configuration in a specified sequence. In the
10 three-dimensional CAD system, such a method has hitherto been generally adopted. This type of CAD is known as a feature-based CAD system. FIGS. 17 and 18 show examples of the basic configurations described above. For example, a sweep may be defined as a basic configuration of a locus depicted when a
15 two-dimensional graphic moves a predetermined distance. Further, the rotary body is a basic configuration of a locus depicted when the two-dimensional graphic rotates about a predetermined axis.

Moreover, in the three-dimensional CAD system, it might
20 often happen that after the three-dimensional configuration has been temporarily generated and again changed. In such a case, it is required that a combination sequence of the already-added basic configuration be changed other than further adding the basic configuration to the final configuration. It is also
25 required that the basic configuration be deleted and reproduced, and its shape and attribute be also changed.

For changing the three-dimensional configuration

described above, the respective basic configurations for forming the three-dimensional configuration have hitherto been specified as follows:

(1) The basic configuration is specified by selecting the basic configuration appearing in the final three-dimensional configuration (such as pointing it with a mouse pointer, etc.).

(2) A feature tree for indicating a combination sequence of the basic configurations is displayed, and the basic configuration is specified by selecting the basic configuration expressed in the feature tree.

According to the method (1), however, there might be a case where all the basic configurations combined are invisible in the final three-dimensional configuration. For instance, if the final three-dimensional configuration is obtained by cutting a part of an in-the-making three-dimensional configuration, a basic configuration contained in the cut-off portion does not appear in the final three-dimensional configuration. It is therefore unfeasible to select the basic configuration contained in the cut-off portion.

Further, according to the method (2), the user is unable to grasp the in-the-making three-dimensional configuration and the basic configuration to be added. Hence, there might be induced a mis-operation such as changing the basic configuration that the user does not intend, and so forth.

SUMMARY OF THE INVENTION

It is a primary object of the present invention, which

was devised to obviate the problems inherent in the prior art, to provide a function of making a user grasp and specify a basic configuration invisible in a final three-dimensional configuration in a three-dimensional CAD system for creating
5 a three-dimensional configuration by sequentially combining the basic configurations.

It is another object of the present invention to provide a function of, after making the user grasp an actual configuration, changing a combination sequence of the basic configurations,
10 deleting and reproducing the basic configuration, or changing a shape and an attribute thereof.

To accomplish the above objects, according to one aspect of the present invention, there is provided a solid editing method in a three-dimensional CAD system, having a display screen
15 and an operation unit for operating basic configurations displayed on the display screen, for completing a final three-dimensional configuration by an operation of combining a plurality of basic configurations. The solid editing method comprises a step of displaying, on the display screen,
20 in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration, a selecting step of selecting one of the in-the-making configurations displayed, and a step of setting as an edit target the basic configuration finally combined with
25 respect to the selected in-the-making configuration.

The basic configuration connoted herein is a fundamental configuration for forming the three-dimensional configuration.

These basic configurations are combined in a specified sequence, thereby generating the three-dimensional configuration.

The in-the-making configuration is a three-dimensional configuration at a stage of its being in the making till the
5 final three-dimensional configuration is completed by sequentially combining the basic configurations.

According to the present invention, the user is made to pick up such an in-the-making configuration, and the basic configuration combined last in the selected in-the-making
10 configuration, is set as an edit target.

According to another aspect of the present invention, a readable-by-computer recording medium may be recorded with a program for indicating a computer to edit a three-dimensional configuration formed by sequentially combining basic
15 configurations. This program comprises a step of displaying, on the display screen, in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration, a selecting step of selecting one of the in-the-making configurations displayed, and a step
20 of setting as an edit target the basic configuration finally combined with respect to the selected in-the-making configuration.

This program may further comprise a step of generating a sum (disjunction) of the basic configurations, a difference
25 between the basic configurations, and a product (conjunction) of the basic configurations.

In this program, the selecting step may further involve

a step of selecting a first in-the-making configuration and a second in-the-making configuration, and the program further comprises a sequence changing step changing a combination sequence of the basic configuration set as an edit target with
5 the selection of the first in-the-making configuration, to just posterior (or just anterior) to the second in-the-making configuration.

The three-dimensional configuration may be stored in the form of element data representing the basic configuration, and
10 sequence indicating data representing a combination sequence of plural items of element data, and the sequence changing step may involve changing the sequence indicating data.

This program may further comprise a step of deleting the edit target basic configuration from the combination of the basic
15 configuration forming the final three-dimensional configuration.

This program may further comprise a step of setting the edit target basic configuration in a non-display state (or a display state from the non-display state) with respect to the
20 combination of the basic configurations for forming the final three-dimensional configuration.

In this program, the selecting step may involve a step of selecting the first in-the-making configuration and the second in-the-making configuration, and the program may further
25 comprises a step of reproducing the basic configuration set as the edit target due to the first in-the-making configuration, to the second in-the-making configuration.

This program may further comprise a step of changing the edit target configuration or changing attributes thereof.

According to a further aspect of the present invention, a readable-by-computer recording medium may be recorded with a program for indicating a computer to edit a three-dimensional configuration formed by sequentially combining basic configurations. This program comprises a step of displaying in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration, a selecting step of selecting the basic configuration visible in the in-the-making configuration displayed, and a step of setting the selected basic configuration as an edit target.

As explained above, according to the present invention, in the three-dimensional CAD system for forming the final three-dimensional configuration by sequentially combining the basic configurations, the in-the-making configurations down to the final three-dimensional configuration are displayed, and the basic configuration as an edit target is specified by selecting one of these in-the-making configurations. Hence, according to the present invention, it is possible to make the user grasp and specify even the basic configuration invisible in the finally generated three-dimensional configuration.

Moreover, in the three-dimensional CAD system, after making the user actual configuration, it is feasible to change the combination sequence of the basic configurations for forming the three-dimensional configuration, delete and reproduce the

basic configuration, or change its shape and attribute.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram showing a hardware architecture of
5 a CAD system in an embodiment of the present invention;

FIG. 2 is a diagram showing a program-based architecture
in the CAD system in the embodiment of the present invention;

FIG. 3 is a view showing an example 1 of forming a
three-dimensional configuration by combining the basic
10 configurations;

FIG. 4 is a chart showing a data structure for expressing
the three-dimensional configuration;

FIG. 5 is a view showing an example 2 of forming the
three-dimensional configuration by combining the basic
15 configurations;

FIG. 6 is a view showing an example 1 of an operation screen;

FIG. 7 is a view showing an example 2 of the operation
screen;

FIG. 8 is a flowchart showing a three-dimensional
20 configuration change process;

FIG. 9 is a flowchart showing a combination sequence change
process;

FIG. 10 is a flowchart showing a basic configuration
deleting process;

FIG. 11 is a flowchart showing a display/non-display
switching process;

FIG. 12 is a flowchart showing a basic configuration

reproducing process;

FIG. 13 is a flowchart showing a configuration change process;

FIG. 14 is a flowchart showing an attribute change process;

5 FIG. 15 is a flowchart showing a change target specifying process;

FIG. 16 is a view showing an example of specifying a display range based on a feature tree;

10 FIG. 17 is a view showing an example 1 of the basic configurations; and

FIG. 18 is a view showing an example 2 of the basic configurations.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

15 [Embodiment]

An embodiment of the present invention will hereinafter be described with reference to FIGS. 1 through 16.

FIG. 1 is a diagram showing a hardware architecture of a CAD system in this embodiment. FIG. 2 is a diagram showing an architecture based on a program executed by a CPU 3 of the CAD system shown in FIG. 1. FIG. 3 shows one example in which a three-dimensional configuration is formed by combining basic configurations. FIG. 4 is a chart showing a data structure for expressing the three-dimensional configuration illustrated in FIG. 3. FIG. 5 shows a second example in which the three-dimensional configuration is formed by combining the basic configurations. FIGS. 6 through 15 are flowcharts each showing

20

25

processes of a three-dimensional CAD system program shown in FIG. 2. FIG. 16 shows an example of an operation with respect to a feature tree for expressing a sequence of combining the basic configurations.

5 <Architecture>

FIG. 1 illustrates the hardware architecture of the CAD system in this embodiment. As shown in FIG. 1, this CAD system includes a memory 2 for storing a program and data, a CPU 3 for executing the program stored in the memory 2, a hard disk 4 for recording the program and the data, a keyboard 5 for a user to input character data, etc. to the CPU 3, a mouse 6 for the user to point graphic forms, etc. to the CPU, and a CRT 7 for displaying configuration data, etc. recorded on the hard disk 4.

The memory 2 is stored with the program and the data.

15 The CPU 3 executes the program stored in the memory 2, thereby providing a function of the three-dimensional CAD system. To be more specific, the CPU 3 generates three-dimensional CAD data and stores the hard disk 4 with the same CAD data in accordance with an indication from the user. Further, the CPU 3 reads the
20 data stored in the hard disk 4 and displays a three-dimensional configuration of the data on the CRT 7.

The hard disk 4 is stored with the program and the data (which corresponds to a readable-by-computer recording medium).

25 The user of this CAD system inputs character data, etc. to the CPU 3 by use of the keyboard 5. Further, the user indicates the graphic forms, etc, to the CPU by using the mouse 6. The keyboard 5 and the mouse 6 correspond to an operation unit.

FIG. 2 is the diagram showing the program-based architecture of the CAD system. This CAD system includes a window system 11 serving as a user interface, a three-dimensional CAD program 10 that receives the indication of the user from the window system 11 and generates three-dimensional configuration data 13, and a three-dimensional configuration arithmetic module 12 for executing an arithmetic operation with respect to the three-dimensional configuration data 13 and displaying an arithmetic result on the CRT 7 in response to a command given from the three-dimensional CAD program 10.

The three-dimensional CAD program 10 receives the user's indication via the window system 11, and generates the three-dimensional configuration data 13 in accordance with this indication. Further, the three-dimensional CAD program 10 stores the hard disk 4 with the thus generated three-dimensional configuration data 13. Moreover, the three-dimensional CAD program 10 transfer the generated three-dimensional configuration data 13 to the three-dimensional configuration arithmetic module 12, which in turn executes the arithmetic operation with respect to the three-dimensional configuration data 13.

The window system 11 detects the user operates the keyboard 5 and the mouse 6, and transfers the user's operation to the three-dimensional CAD program 10. Further, the window system 11 displays the arithmetic result of the three-dimensional configuration arithmetic module 12 on the CRT 7.

The three-dimensional configuration arithmetic module 12

executes the arithmetic operation with respect to the three-dimensional configuration data 13 in response to the command given from the three-dimensional CAD program 10. In this arithmetic operation, the basic configurations are combined in a combination sequence determined for every set of the three-dimensional configuration data 13. A three-dimensional configuration is generated by combining these basic configurations.

Logic operation functions (AND, OR, SUBTRACT, etc.) may be specified in this process of combining the basic configurations (which corresponds to a step of generating a sum of the basic configurations, a difference therebetween or a product thereof). For example, a basic configuration 1 and a basic configuration 2 are ANDed (processed with AND operation), thereby generating a common portion of these two basic configurations. Moreover, the basic configuration 1 is Ored (processed with OR operation) with the basic configuration 2, thereby generating an added configuration of these two basic configuration. Further, the basic configuration 2 is SUBTRACTed from the basic configuration 1, thereby generating a configuration into which the basic configuration 2 is excluded from the basic configuration 1. If the logic operation is not designated, however, OR (corresponding to an addition) is executed as a default operation.

The generated three-dimensional configuration is displayed on the CRT 7 via the window system 11.

<Generation process of Three-Dimensional Configuration>

FIG. 3 shows one example of a process of generating the three-dimensional configuration by the present CAD system. In this CAD system, the three-dimensional configuration is generated by sequentially combining the basic configurations as shown in FIG. 3 (by executing the logic operation between the basic configurations in a predetermined combination sequence).

Referring to FIG. 3, at first a two-dimensional graphic sweep configuration 20 (hereinafter simply referred to as a sweep 20) is generated. The sweep 20 may be defined as a configuration corresponding to a locus depicted when a two-dimensional graphic A (shown as a rectangle in FIG. 3) moves by a depth W1.

Next, a sweep hole 21 taking a circular shape in section is added to the sweep 20. The sweep hole 21 is a hole shape corresponding to a locus depicted when a circle having a radius R moves by a depth W2.

Subsequently, a sweep hole 22 taking a rectangular shape in section is added to the sweep 20. The sweep hole 22 is a hole shape corresponding to a locus drawn when a rectangle B moves by a depth W3.

Next, the sweep 20 is sheet-cut by a sheet S. A left portion 24 from the sheet S is thereby cut off, and a right portion 23 from the sheet S is left. The right portion 23 from the sheet S is an eventually formed three-dimensional configuration.

FIG. 4 shows the data structure for expressing the three-dimensional configuration created in the procedures in FIG. 3. This data structure is formed by linking configuration

elements (corresponding to element data) each taking a predetermined structure with pointers (corresponding to sequence indicating data) (this data structure may be termed a list structure).

5 This list structure starts with a head element 30. The head element 30 has a name of the three-dimensional configuration and a pointer to the next configuration element. The name of the three-dimensional configuration is a name of a configuration expressed by a whole list structure indicated by the head element
10 30.

 Further, a basic configuration element 31 is pointed by the pointer to the next configuration element within the head element 30. The basic configuration element 31 is stored with data for expressing one single basic configuration. This basic
15 configuration element 31 includes fields such as "Pointer to Next Element", "Name", "Category", "Two-Dimensional Graphic", "Depth", "Application Method" and "Comment".

 A next basic configuration element 31 is pointed by the pointer to the next element. If the pointer is NULL, this implies
20 that the very basic configuration element 31 is a tail of the list structure.

 The name in the basic configuration element 31 is a name of this basic configuration. This name is given by the user.

 The category in the basic configuration element 31 is a
25 category of this basic configuration. The categories of the basic configurations are, for instance, a two-dimensional graphic sweep configuration (simply referred to as a sweep),

a sweep hole, a sheet-cut, etc. (see FIG. 17 and 18).

The two-dimensional graphic in the basic configuration element 31 is a graphic as a basis for shaping the three-dimensional configuration. This two-dimensional graphic is a sectional shape in, e.g., the two-dimensional sweep configuration and the sweep hole.

Further, in the sheet-cut, the two-dimensional configuration is coordinates indicating a position for cutting. The coordinates thereof are not, however, three-dimensional coordinates but two-dimensional coordinates within the section perpendicular to the sheet taking the three-dimensional configuration.

The depth in the basic configuration element 31 shows a moving quantity when sweeping. This depth is given to the sweep graphics such as the two-dimensional graphic sweep configuration, the sweep hole, etc..

The comment in the basic configuration element 31 is a character string arbitrarily given by the user.

FIG. 5 shows a second example of the process of generating the three-dimensional configuration in the present CAD system. In the left line in FIG. 5, a first basic configuration (a sweep 35) is provided with a sweep 36, thereby generating an in-the-making configuration 35a. Further, the in-the-making configuration 35a is provided with a sweep hole 37, thereby generating a final three-dimensional configuration 35b.

On the other hand, in the right line in FIG. 5, the first basic configuration (the sweep 35) is provided with the sweep

37, thereby generating an in-the-making configuration 35c. Further, the in-the-making configuration 35c is provided with the sweep 36, thereby generating a final three-dimensional configuration 35d.

5 Thus, the three-dimensional configuration finally generated differs depending on the sequence of combining the basic configurations. Moreover, as shown in FIG. 3, all the basic configurations used are not necessarily visible in the finally obtained three-dimensional configuration as the case
10 may be.

 In the CAD system in this embodiment, the user is provided with a function to grasp the basic configurations combined for forming the three-dimensional configuration, including the basic configurations which are invisible at the final stage.
15 Then, the user is thereby able to change the sequence of combining the basic configurations, to delete, reproducing and change the respective basic configurations, and to change attributes thereof.

<Operation Screen>

20 FIG. 6 illustrates an operation screen displayed on the CRT 7 of the present CAD system. To start with, the user specifies a name of the three-dimensional configuration (a name held in the head element 30 in FIG. 4) that the user has a scheme to change. Then, in-the-making configurations in the process of
25 forming this three-dimensional configuration are displayed on the operation screen (a three-dimensional configuration change window) in FIG. 6. These in-the-making configurations are

displayed based on the sequence of combining the basic configurations for forming the three-dimensional configuration (which corresponds to a step of displaying the in-the-making configuration on the display screen).

5 Referring to FIG. 6, an in-the-making configuration 20a is formed by adding a sweep hole 21 to the first basic configuration 20. A sweep hole 22 is added to the in-the-making configuration 20a, thereby generating an in-the-making configuration 20b. The in-the-making configuration 20b is sheet-cut, thereby
10 generating a final three-dimensional configuration 23.

There are a great number of basic configurations for forming a designated three-dimensional configuration, and all the in-the-making configurations might not be displayed depending on the screen in FIG. 6 in some cases. In such a
15 case, the screen may be scrolled by a scroll bar 42 or scroll buttons 43, 44 for scrolling in up-and-down directions. The user is able to select any one of those in-the-making configurations by framing it with a rectangle cursor 41 by use of a mouse pointer 40.

20 Referring again to FIG. 6, the in-the-making configuration 20a is picked up by this selection (corresponding to a selecting step). In the present CAD system, with the selection of this in-the-making configuration, the basic configuration (the sweep hole 21 in FIG. 6) finally combined for forming the same
25 in-the-making configuration is specified (which corresponds to a step setting the finally combined basic configuration as an edit target). This basic configuration becomes a target for

the sequence change, the deletion, the reproducing, the configuration change, the attribute change, etc..

Now, it is presumed that, for example, the sweep hole 21 invisible in the finally generated three-dimensional configuration 23 is to be changed. In this case, the user displays the in-the-making configuration on the present operation screen. Then, the user specifies the sweep hole 21 by choosing the corresponding in-the-making configuration 20a.

FIG. 7 shows an example of the operation of changing the sequence change of the basic configurations.

The user, to begin with, selects the sequence change from an edit menu by use of the mouse pointer 40.

Next, the user selects an in-the-making configuration 35b with a rectangle cursor 41a by operating the mouse pointer 40 (the in-the-making configuration 35b may be defined as a final three-dimensional configuration in this example). As a result, there is specified the basic configuration (the sweep hole 37) finally combined for generating the in-the-making configuration 35b. As shown in FIG. 7, in the present CAD system, the specified basic configuration (the sweep hole 37 in FIG. 7) is displayed emphatically with a bold line.

Subsequently, the user pinpoints where the specified basic configuration moves to. A position to which the specified basic configuration moves is specified by selecting the in-the-making configuration (the sweep 35) as a moving destination with a rectangle cursor 41b by manipulating the mouse pointer 40. In this case, the graphic finally combined with the in-the-making

configuration is the sweep 35 itself.

With the operations described above, the basic configuration (the sweep hole 37) is combined, instead of the in-the-making configuration 35a, with the first basic configuration (the sweep 35). As a consequence, the three-dimensional configuration 35b shown in the left line in FIG. 5 becomes as the three-dimensional configuration 35d shown in the right line is.

The processing of the three-dimensional CAD program 10 shown in FIG. 2 will be described in conjunction with the drawings in FIGS. 8 through 15. The CPU 3 provides the functions described above by executing the three-dimensional CAD program 10.

<Outline of Three-Dimensional Configuration Change Process>

FIG. 8 shows a whole of a three-dimensional graphic change process (corresponding to a solid editing) of the three-dimensional CAD program 10. The CPU 3, when the edit menu shown in FIG. 7 is selected, executes the process in FIG. 8.

To begin with, the CPU 3 judges whether or not the indication is the sequence change (step S1, which will hereinafter be abbreviated to S1). If judged to be sequence change (Yes judgement in S1), the CPU 3 executes a combination sequence change process (S2).

Whereas if not (No judgement in S1), the CPU 3 judges whether or not it is the deletion (S3). If judged to be deletion (Y in S3), the CPU 3 executes a basic graphic deleting process (S4).

Whereas if not (N in S3), the CPU 3 judges whether or not

display/non-display is carried out (S5). If judged to be the display/non-display (Y in S5), the CPU 3 executes a display/non-display switching process (S6).

Whereas if not (N in S5), the CPU judges whether or not it is the reproducing (S7). If judged to be the reproducing (Y in S7), the CPU executes a basic configuration reproducing process (S8).

Whereas if not the reproducing (N in S7), the CPU 3 judges whether or not the indication is the configuration change (S9). If judged to be the configuration change (Y in S9), the CPU 3 executes a configuration change process.

Whereas if not the configuration change (N in S9), the CPU 3 judges whether or not it is the attribute change (S11). If judged to be the attribute change (Y in S11), the CPU 3 executes the attribute change process (S12).

If not the attribute change (N in S11), in the present system, the CPU 3 executes nothing and finishes the three-dimensional configuration change process.

Further, after the combination sequence change process, the basic configuration deletion process, the display/non-display switching process, the basic configuration reproducing process, the configuration change process and the attribute change process, the CPU 3 executes a final configuration display process (S13). As a result, the finally generated three-dimensional configuration is displayed on the CRT 7. Thereafter, the CPU 3 finishes the three-dimensional configuration change process.

<Combination Sequence Change Process>

FIG. 9 is a flowchart showing the combination sequence change process. The combination sequence change process is, as exemplified in FIG. 7, a process of changing the sequence of combining the basic configurations for shaping the three-dimensional configuration.

At first, the CPU 3 executes a change target specifying process (S21). In the change target specifying process, the CPU 3 displays a plurality of in-the-making configurations by sequentially combining the basic configurations for forming the three-dimensional configuration. In this case, in the change target specifying process started from the combination sequence change process, the CPU 3 operates so that the user chooses two pieces of in-the-making configurations among those displayed.

First, this intends to specify the basic configuration for changing the combination sequence. Namely, the basic configuration finally combined for generating the in-the-making configuration is specified as a change target basic configuration.

Second, that intends to specify where the above specified basic configuration moves to. That is, the moving destination is the in-the-making configuration selected second.

Next, the CPU 3 transfers the above basic configuration to the moving destination described above (S22, which corresponds to a sequence changing step). This process being thus done, in the list structure shown in FIG. 4, a position of the change target basic configuration element 31 shifts. In this shift,

the "Pointer to Next Element" in the basic configuration element 31 is changed (a basic configuration element address on the memory 3 is not changed). More specifically, the change target basic configuration element 31 is pointed by the "Pointer to Next Element" included in the moving destination basic configuration element 31. Further, the "Pointer to Next Element" included in the changing target basic configuration element 31 points a next basic configuration element 31 after the movement. The combination sequence (a sequence in terms of the list structure) of the basic configuration element 31 is thereby changed.

Thereafter, the CPU 3 finishes the combination sequence change process.

<Basic Configuration Deleting Process>

A basic configuration deleting process will be explained referring to a flowchart in FIG. 10. The basic configuration deleting process connoted herein is a process of deleting one of the basic configurations which form the three-dimensional configuration.

To begin with, the CPU 3 executes the change target specifying process (S41). The CPU 3 thereby makes the user specify the basic configuration that should be deleted.

Next, the CPU 3 deletes the specified basic configuration (S42). With this process, the corresponding element is deleted from the list structure illustrated in FIG. 4. In this case, the basic configuration element 31 corresponding to the basic configuration to be deleted, is deleted from the list structure. Further, in the list structure, the "Pointer to Next Element"

included in basic configuration element 31 positioned anterior to the deleted basic configuration element 31, points a basic configuration element 31 positioned posterior to the deleted basic configuration element 31.

5 Thereafter, the CPU 3 finishes the basic configuration deleting process.

 <Display/Non-Display Switching Process>

 A display/non-display switching process will be described with reference to a flowchart in FIG. 11. The
10 display/non-display switching process involves setting one of the basic configurations forming the three-dimensional configuration so that this single basic configuration exists in the list structure shown in FIG. 4 but is invisible in the display of the finally generated three-dimensional. This
15 setting is temporarily retained in the memory 2 but is not retained in the list structure for expressing the three-dimensional configuration.

 At first, the CPU 3 executes the change target specifying process (S61). The user is thereby made to specify the basic
20 configuration of which the display and non-display are switched.

 Next, the CPU 3 switches the display/non-display state of the specified basic configuration (S62). With this process, the configuration kept in the display state is switched in the non-display state. On the other hand, when the specified basic
25 configuration is in the non-display state, this configuration turns out to be in the display state. Thereafter, the CPU 3 finishes the display/non-display switching process.

<Basic Configuration Reproducing Process>

FIG. 12 is a flowchart showing a basic configuration reproducing process. the basic configuration reproducing process is a process of reproducing one of the basic configurations shaping the three-dimensional configuration, and adding this reproducing to any one of the in-the-making configurations in the process of becoming the finally generated three-dimensional configuration.

At the first onset, the CPU 3 executes the change target specifying process (S81). In the basic configuration reproducing process, the CPU 3, as in the case of the combination sequence change process, makes the user choose two pieces of the in-the-making configurations among those displayed.

First, this intends to specify the basic configuration to be reproduced. Namely, for generating the in-the-making configuration specified first, the basic configuration finally combined is specified as a reproducing target basic configuration.

Second, that intends to specify where the above specified basic configuration reproduced is added to. That is, the in-the-making configuration specified first is reproduced and added to an in-the-making configuration specified second.

Next, the CPU 3 adds the above basic configuration to the reproducing destination described above (S82). With this process, the corresponding element in the list structure shown in FIG. 4 is reproduced to a position corresponding to the specified in-the-making configuration. In this case, a basic

configuration element 31 is newly generated in the list structure and added posterior to the basic configuration element 31 corresponding to the reproducing destination.

Thereafter, the CPU 3 finishes the basic configuration reproducing process.

<Configuration Change Process>

A configuration change process will be explained with reference to a flowchart in FIG. 13. The configuration change process is a process of change one configuration of the basic configurations that form the three-dimensional configuration.

At first, the CPU executes the change target specifying process (S101). With this execution, the CPU makes the user specify the basic configuration to be changed.

Next, the CPU 3, in accordance with the user's operation of the mouse 6 or the input through the keyboard 5, changes the elements, e.g., a sectional shape, dimensions, etc. which form the specified basic configuration (S102). With this process, in the list structure shown in FIG. 4, two-dimensional configurations or depths of the corresponding elements are changed. Thereafter, the CPU 3 finishes the configuration change process.

<Attribute Change Process>

An attribute change process will be described referring to a flowchart in FIG. 14. The attribute change process connotes a process of changing attributes, e.g., a name, a category, an application method (arithmetic operation), a comment, etc. of one of the basic configurations forming the three-dimensional

configuration.

At first, the CPU 3 executes the change target specifying process (S121). With this execution, the CPU makes the user specify the basic configuration to be changed.

5 Next, the CPU 3, according to the user's operation of the mouse 6 or the input through the keyboard 5, changes the attributes of the specified basic configuration (S122). With this process, in the list structure shown in FIG. 4, there are changed the name, the category, the application method (logic operation),
10 the comment, etc. of the corresponding element. Thereafter, the CPU 3 finishes the attribute change process.

<Change Target Specifying Process>

The change target specifying process will be explained referring to a flowchart in FIG. 15. The change target specifying
15 process is executed as a common module for specifying the change target in the combination sequence change process, the basic configuration deleting process, the display/non-display switching process, the basic configuration reproducing process, the configuration change process and the attribute change
20 process.

In the change target specifying process, a start in-the-making configuration and an end in-the-making configuration are specified (which may be called a specification of a display range). In this specification, with respect to
25 a feature tree, the user selects which range the in-the-making configuration is displayed in by use of the mouse 6. FIG. 16 shows an example of specifying the range based on the feature

tree. In this feature tree, each basic configuration is indicated by a number for indicating the combination sequence and a name. For example, "1 Rectangular Parallelopiped S" implies that a basic configuration named a rectangular
5 parallelopiped S is combined first. Further, "2 Round Hole H1" implies that a basic configuration named a round hole H1 is combined second.

Referring to FIG. 16, rectangular cursors 41c, 41d are generated by the mouse pointer 40, whereby display ranges are
10 selected. Each of the basic configurations embraced by the selected display ranges is framed by a bold line with a bold arrowhead indicating a combination sequence.

Note that if the start in-the-making configuration and the end in-the-making configuration are not specified, all the
15 in-the-making configurations from the first basic configuration down to the last three-dimensional configuration are displayed as a default.

In the change target specifying process in this embodiment, a plurality of in-the-making configurations can be picked up
20 from the in-the-making configurations displayed. For instance, in the combination sequence change process described above, the first in-the-making configuration for specifying the basic configuration of which the sequence is to be changed and the second in-the-making configuration for specifying the moving
25 destination, are selected. Further, in the basic configuration deleting process, one in-the-making configuration for specifying the basic configuration as a deletion target is

selected.

The change target specifying process for providing the function given above will be explained referring to FIG. 15. In the change target specifying process, the CPU 3, to start with, generates the basic configuration to be displayed at first (S200). Herein, if the display range described above is specified, the first in-the-making configuration thereof is displayed.

Whereas if not specified, among all the basic configurations shaping the three-dimensional configuration, a basic configuration corresponding to the head basic configuration element 31 in the list structure (FIG. 4), is displayed.

Moreover, the CPU 3 generates a basic configuration that should be combined next (S201). The basic configuration to be combined next is obtained by tracing the next basic configuration element 31 in the list structure shown in FIG. 4.

Next, the CPU 3 combines the basic configuration generated in S201 with the basic configuration (or the in-the-making configuration) generated in S200 (S202). In this combination, the logic operations (AND, OR, SUBTRACT) are executed based on the application method included in the basis configuration element 31 shown in FIG. 4.

Subsequently, the CPU 3 displays the three-dimensional configuration (which becomes a next in-the-making configuration) formed by combining the basic configurations (S203).

Next, the CPU 3 judges whether or not the next in-the-making configuration (S204). Namely, the CPU 3 judges whether or not all the in-the-making configurations in the display ranges are displayed. Next, if there is left the in-the-making

5 configuration that should be displayed (Y in S204), the CPU 3 returns the control to S200. In the process in S200, the CPU 3 copies the in-the-making configuration displayed at the present, as a next in-the-making configuration. thereafter, the CPU 3 executes processes from S201 onward in the same way as the
10 above-mentioned.

Subsequently, if there is not the in-the-making configuration that should be displayed (N in S204), the CPU indicates the user to select the in-the-making configuration (S205). This is attained by picking up a particular (or a final
15 three-dimensional configuration) among the in-the-making configurations displayed by use of the mouse 6.

Next, the CPU 3 judges whether or not the next in-the-making configuration should be selected. For instance, when choosing one single in-the-making configuration, a judgement in S206 is
20 No, and the processing comes to an end. On the other hand, when selecting two or more in-the-making configurations, the judgement in S206 continues to be Yes till a predetermined number of basic configurations are selected. In this case, after repeating the selection of the in-the-making configuration a
25 predetermined number of times (S205), the CPU 3 finishes the process.

As discussed above, in the CAD system in this embodiment,

the in-the-making configurations from the first basic configuration as a start configuration down to the last three-dimensional configuration, are displayed on the operation screen. Then, the present CAD system indicates the user to choose one of the in-the-making configurations displayed, and, with respect to the selected the in-the-making configuration, the basic configuration finally combined is set as a change target. Therefore, the user is able to grasp even the basic configuration invisible in the finally generated three-dimensional configuration, e.g., a basic configuration, etc. contained in a portion cut off by the sheet-cut, and thereafter specify the change target.

Further, as explained above, after displaying the in-the-making configurations, the user is made to perform the operations such as changing the combination change, deleting the basic configuration, switching the display/non-display, reproducing, changing the configuration, changing the attributes and so on, with respect to the change target basic configuration. Accordingly, there must be a less probability of inducing a mis-operation.

Moreover, the CAD system in this embodiment functions, in the change target specifying process, to specify the display range by use of the feature tree, and therefore a necessary graphic display time is reduced. As a result, the user is capable of efficiently change the three-dimensional configuration data.

<Modification of Basic Configuration Specifying Method>

In accordance with this embodiment, the CPU displays the

plurality of in-the-making configurations. Then, the CPU 3 indicates the user to select the in-the-making configuration, and, in this selected in-the-making configuration, the basic configuration combined last time is specified as the change target basic configuration. The embodiment of the present invention is not, however, limited to the specifying method discussed above. For instance, the basic configuration visible in any one of the in-the-making configurations may be selected directly by the mouse 6, etc..

In the change target specifying process in this embodiment, all the in-the-making configurations existing in specified display ranges are displayed (see. E.g., FIG. 6). The embodiment of the present invention is not, however, confined to this method of displaying the in-the-making configuration. For example, the CAD system at first displays one single in-the-making configuration. Then, if this in-the-making configuration is not selected, after the in-the-making configuration displayed at the present has been deleted, a next in-the-making configuration may be displayed.

<Modification of Combination Sequence Change Process>

In the embodiment discussed above, the CPU 3 indicates the user to select the two in-the-making configurations, and changes the combination sequence (combination target) of the basic configuration specified from the first in-the-making configuration at the end of the second in-the-making configuration. The embodiment of the present invention is not, however, restricted to this combination sequence change process.

for example, the user is made to select in the same way as the above, to begin with, the basic configuration specified from the first in-the-making configuration is set as a target of the combination sequence change (this is the same as what has been described above). Then, the combination sequence (combination target) may be set just before the second in-the-making configuration. As a consequence, the basic configuration specified from the first in-the-making configuration is combined with the end of the in-the-making configuration positioned one before the second in-the-making configuration.

<Readable-by-Computer Recording Medium>

In the embodiment discussed above, the hard disk 6 is used as a readable-by-computer recording medium for recording the program. The embodiment of the present invention is not, however, limited to this type of recording medium.

Herein, the readable-by-computer recording medium embraces recording mediums capable of storing information such as data, programs, etc. electrically, magnetically, optically and mechanically or by chemical action, which can be all read by the computer. What is demountable out of the computer among those recording mediums may be, e.g., a floppy disk, a magneto-optic disk, a CD-ROM, a CD-R/W, a DVD, a DAT, an 8mm tape, a memory card, etc..

Further, a hard disk, a ROM (Read Only Memory) and so on are classified as fixed type recording mediums within the computer.

<Data Communication Signal Embodied in Carrier Wave>

Furthermore, the three-dimensional CAD program and the three-dimensional configuration arithmetic module may be stored in the hard disk and the memory of the computer, and downloaded to other computers via communication media. In this case, the program is transmitted as data communication signals embodied in carrier waves via the communication media. Then, the computer downloaded with this program can be made to function as the CAD system explained in this embodiment.

Herein, the communication media may be classified into cable communication mediums (such as metallic cables including an optical communication cable, a coaxial cable and a twisted pair cable), and wireless communication media (such as satellite communications, ground wave wireless communications, etc.).

Further, the carrier waves are electromagnetic waves for modulating the data communication signals, and the light and DC signals are included therein. Accordingly, the data communication signal embodied in the carrier wave may be classified into a signal taking a modulated broadband waveform and a signal taking an unmodulated base band waveform. Namely, in the case of setting a DC signal having a voltage of 0 as a carrier wave, the data communication signal takes the base band waveform.

<Other Modified Examples>

In the embodiment discussed above, the keyboard 5 and the mouse 6 are used as the operation unit. The embodiment of the present invention is not, however, limited to these devices. For instance, a touch panel, a joystick or a trackball may also

be used as an operation unit.

Moreover, in the embodiment discussed above, the CRT 7 is used for displaying the operation screen. The embodiment of the present invention is not, however, confined to the CRT 7 as a display device. For example, a liquid crystal display may also be used.

Further, in the embodiment discussed above, the cursor displayed on the operation screen is not restricted to the rectangle cursor. For instance, an arrowhead and a cross cursor may also be used as cursors.

WHAT IS CLAIMED IS:

1. A solid editing method in a three-dimensional CAD system, having a display screen and an operation unit for operating basic configurations displayed on said display screen, for completing
5 a final three-dimensional configuration by an operation of combining a plurality of basic configurations, said method comprising:

10 a step of displaying, on said display screen, in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration;

a selecting step of selecting one of the in-the-making configurations displayed; and

15 a step of setting as an edit target the basic configuration finally combined with respect to the selected in-the-making configuration.

2. A readable-by-computer recording medium recorded with a program for indicating a computer to edit a three-dimensional
20 configuration formed by sequentially combining basic configurations, said program comprising:

25 a step of displaying, on said display screen, in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration;

a selecting step of selecting one of the in-the-making configurations displayed; and

a step of setting as an edit target the basic configuration finally combined with respect to the selected in-the-making configuration.

5 3. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said program further comprises a step of generating a sum of the basic configurations, a difference between the basic configurations, and a product of the basic configurations.

10 4. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said selecting step involves a sequence changing step of selecting a first in-the-making configuration and a second in-the-making
15 configuration, and the program further comprises a sequence changing step changing a combination sequence of the basic configuration set as an edit target with the selection of the first in-the-making configuration, to just posterior (or just anterior) to the second in-the-making configuration.

20 5. A readable-by-computer recording medium recorded with a program according to claim 4, wherein the three-dimensional configuration is stored in the form of element data representing the basic configuration, and sequence indicating data
25 representing a combination sequence of plural items of element data, and

said sequence changing step involves changing the sequence

indicating data.

6. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said program further comprises a step of deleting the edit target basic configuration from the combination of the basic configuration forming the final three-dimensional configuration.

7. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said program further comprises a step of setting the edit target basic configuration in a non-display state (or a display state from the non-display state) with respect to the combination of the basic configurations for forming the final three-dimensional configuration.

8. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said selecting step involves a step of selecting the first in-the-making configuration and the second in-the-making configuration, and the program further comprises a step of reproducing the basic configuration set as the edit target due to the first in-the-making configuration, to the second in-the-making configuration.

9. A readable-by-computer recording medium recorded with a program according to claim 2, wherein said program further

comprises a step of changing the edit target configuration.

10. A readable-by-computer recording medium recorded with a program according to claim 2, wherein the basic configuration is attached with attributes, and said program further comprises a step of editing the attributes of the edit target.

11. A solid editing method in a three-dimensional CAD system for editing a three-dimensional configuration formed by sequentially combining basic configurations, said method comprising:

a step of displaying in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration;

a selecting step of selecting the basic configuration visible in the in-the-making configuration displayed; and

a step of setting the selected basic configuration as an edit target.

12. A readable-by-computer recording medium recorded with a program for indicating a computer to edit a three-dimensional configuration formed by sequentially combining basic configurations, said program comprising:

a step of displaying in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration;

a selecting step of selecting the basic configuration

visible in the in-the-making configuration displayed; and
a step of setting the selected basic configuration as an
edit target.

00000703:001500

ABSTRACT OF THE DISCLOSURE

Disclosed is a technology of making a user grasp and specify a basic configuration invisible in a finally generated three-dimensional configuration in a three-dimensional CAD system for generating the three-dimensional configuration by sequentially combining the basic configurations. A solid editing method in the three-dimensional CAD system for completing the three-dimensional configuration through a process of combining a plurality of basic configurations displayed on a display screen with an operation unit, comprises a step of displaying in-the-making configurations from a first basic configuration as a start configuration down to the final three-dimensional configuration, a selecting step of selecting one of the basic configurations displayed, and a step of setting, as an edit target, the basic configuration finally combined with respect to the selected in-the-making configuration.

FIG. 1

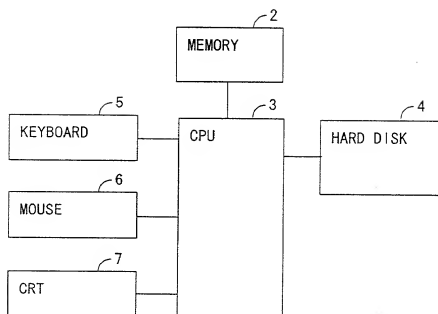


FIG. 2

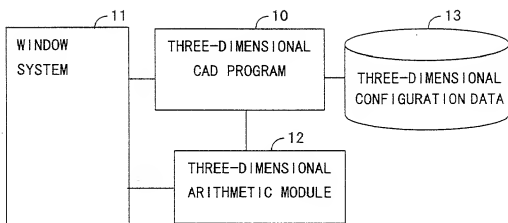


FIG. 3

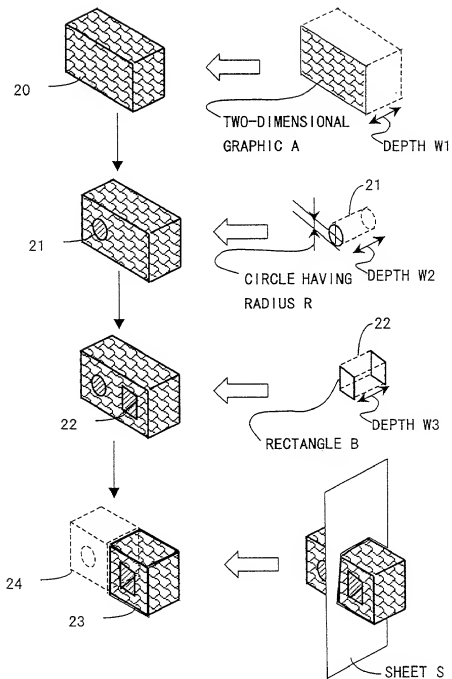


FIG.4

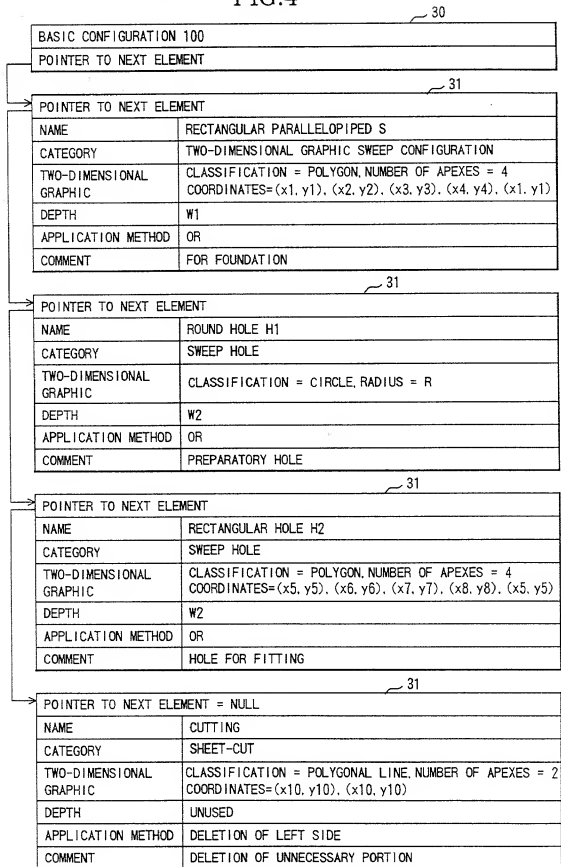


FIG. 5

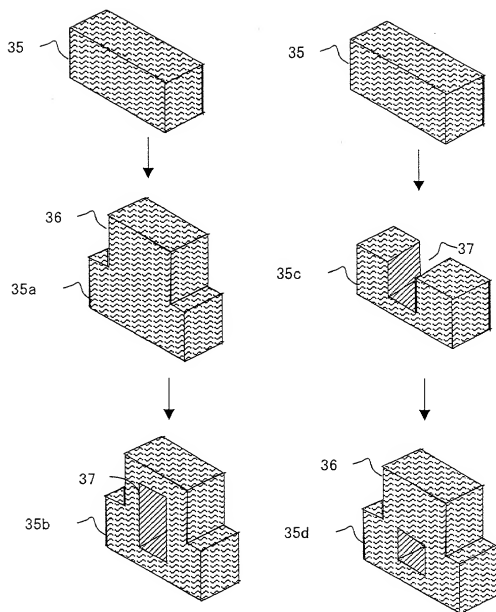


FIG. 6

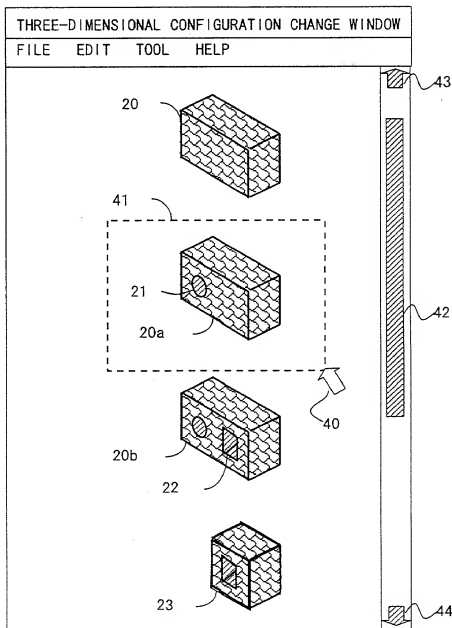


FIG. 7

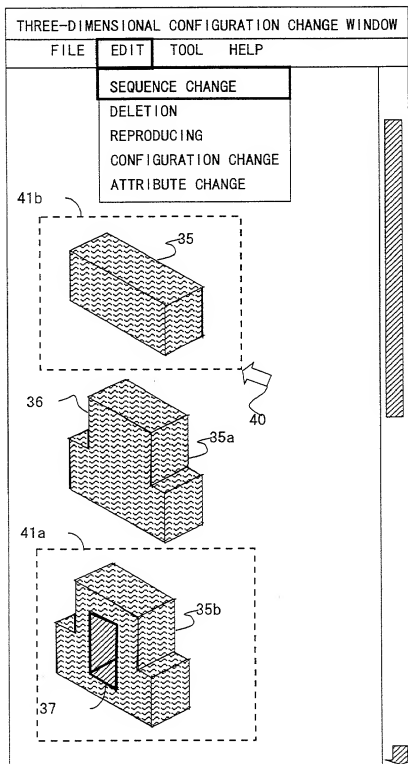


FIG.8

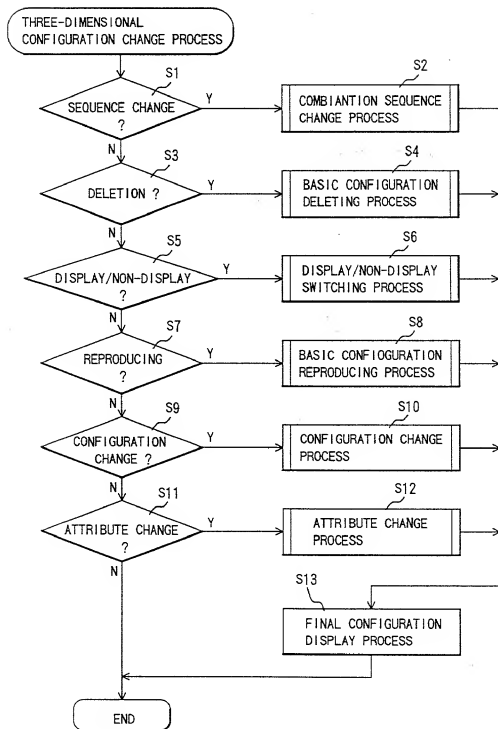


FIG. 9

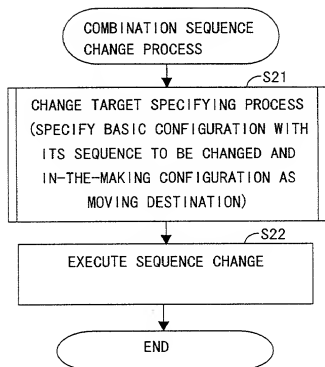


FIG. 10

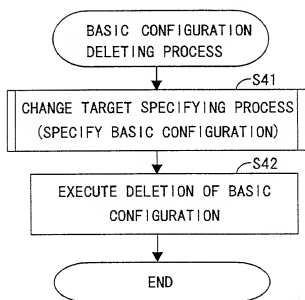


FIG. 11




FIG. 12

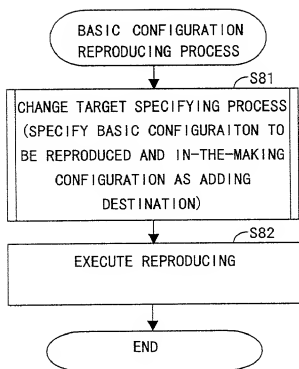


FIG. 13




FIG. 14




FIG.15

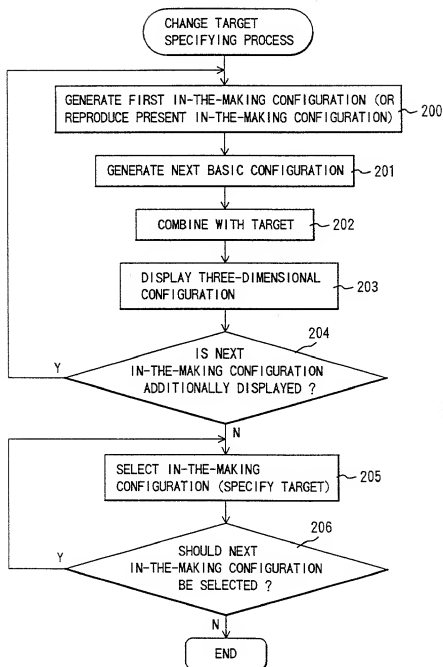


FIG. 16

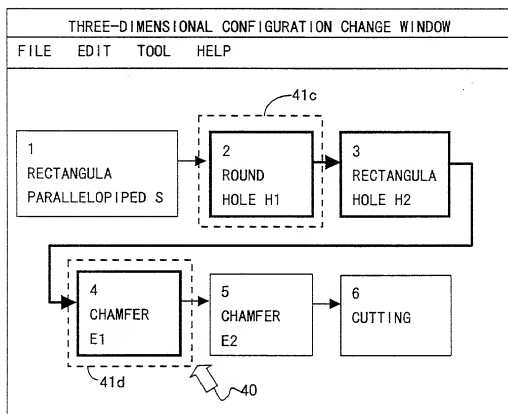


FIG.17


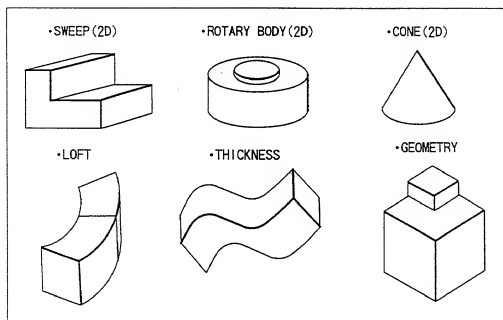


FIG.18

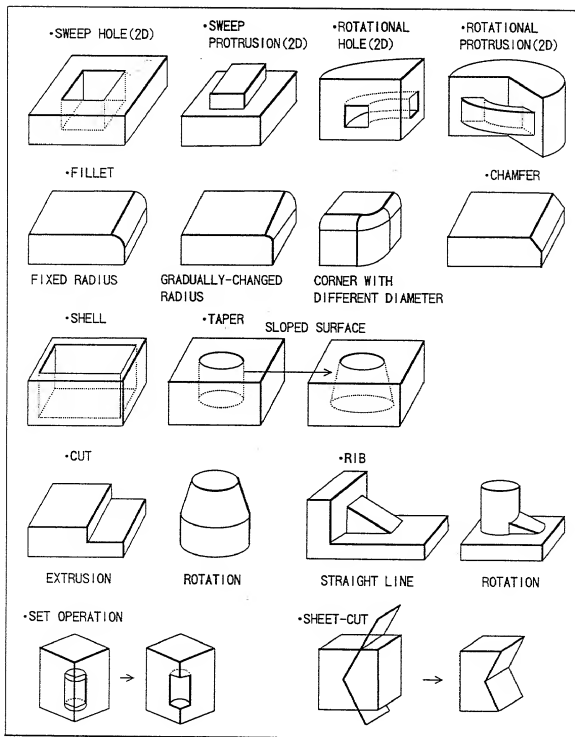

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名が発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

EDITING METHOD AND MEDIUM IN

CAD SYSTEM

上記発明の明細書（下記の欄でx印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に出発され、米国出願番号または特許協定条約
国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、
内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されると
あり、特許資格の有無について重要な情報を開示する義務が
あることを認めます。

I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)又は365条(b)条に基づき下記の、米国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)条に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国で先行出願
2000-74123

Japan

(Number)
(番号)

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

我、第35編米国法典119条(e)条に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編121条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)条に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1011条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

16/03/2000

(Day/Month/Year Filed)
(出願年月日)

☐

(Day/Month/Year Filed)
(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(状況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(状況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許権局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor Atsushi HORIKE	
発明者の署名	日付	Inventor's signature Date Atsushi Horike August 2, 2000
住所	Residence Shizuoka-shi, Shizuoka, Japan	
国籍	Citizenship Japanese	
私書箱	Post Office Address c/o FUJITSU SHIZUOKA ENGINEERING LIMITED, 12th floor, Southspot Shizuoka Bldg. 18-1, Minamicho, Shizuoka-shi, Shizuoka, 422-8572 Japan	
第二共同発明者	Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をする)

(Supply similar information and signature for third and subsequent joint inventors.)